
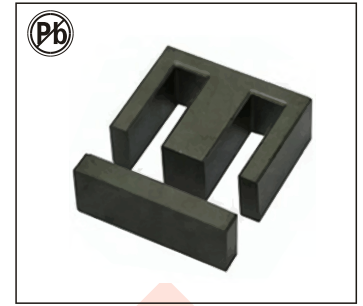


◆ EI Series cores

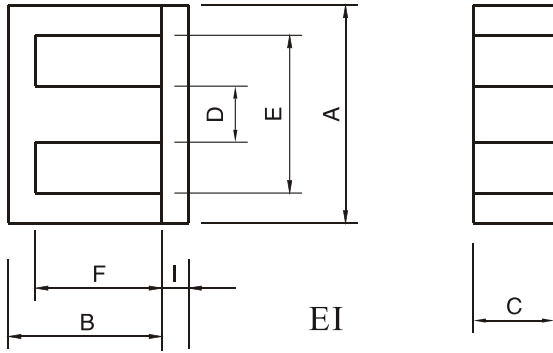

(MATERIALS):H10K, H8K, H6K, H5K, P1, P2, P3
Dimensions & Effective parameter

CORES TYPE	Dimensions(mm)						Effective parameter						
	A	B	C	D	E(min)	F	I	C1(mm ⁻¹)	Ae(mm ³)	Le(mm)	Ve(mm ³)	Al±25% (nH/N ²)	Weight(g)
EI 12.5	12.40±0.3	7.40±0.15	4.85±0.2	2.4±0.1	8.8	5.1±0.1	1.5±0.1	1.477	14.40	21.3	308	1200 (p2)	1.8
EI 16	16.0±0.3	12.7±0.2	5.0-0.4	4.0±0.3	11.6	10.8±0.2	2.0±0.2	1.79	19.8	34.6	670	1100 (p2)	3.0
EI 19	20.0±0.4	13.55±0.3	5.0±0.2	4.55±0.2	14.3	11.30±0.15	2.3±0.2	1.629	24.0	39.6	950	1400 (p2)	4.9
EI 22	22.0±0.5	15.0±0.25	5.75±0.25	5.75±0.3	15.75	10.55±0.25	4.5±0.3	0.94	42.0	39.3	1630	2400 (p2)	10.7
EI 22B	22.0±0.5	14.7±0.3	5.75±0.25	5.75±0.25	15.75	10.8±0.2	4.0±0.2	1.127	37.0	41.8	1550	2000 (p2)	8.7
EI 25	25.3±0.5	16.15±0.25	6.75±0.25	6.50±0.30	19.0	13.25±0.25	2.7±0.2	1.146	41.0	47.0	1927	2140 (p2)	9.8
EI 26	26.0±0.5	16.15±0.25	6.75±0.25	6.50±0.30	19.0	13.25±0.25	2.7±0.2	1.003	46.86	47.0	2202	2300 (p2)	9.6
EI 25.4	25.4±0.4	16.15±0.3	6.75±0.25	6.35±0.30	18.8	12.7±0.3	3.2±0.2	1.191	40.0	48.1	1950	1930 (p2)	10.4
EI 28	28.0±0.5	17.3±0.20	10.75±0.30	7.20±0.30	18.6	12.85±0.3	3.5±0.2	0.570	86.0	48.2	4145	4300 (p2)	22
EI 30	30.0±0.6	21.25±0.25	11.0-0.7	11.0-0.7	19.8	16.25±0.25	5.5±0.3	0.522	111.0	58.0	6440	4850 (p2)	32.5
EI 33	33.0±0.6	24.20±0.3	12.7±0.3	9.70±0.30	23.6	19.25±0.25	5.2±0.3	0.570	118.5	67.5	8002	4500 (p2)	41
EI 33B	33.0±0.6	23.75±0.3	12.7±0.3	9.70±0.30	23.6	19.25±0.3	5.0±0.3	0.570	118.0	67.0	7906	4590 (p2)	39
EI 35	35.0±0.6	24.25±0.25	10.0±0.3	10.0±0.3	24.5	18.15±0.25	4.6±0.3	0.662	101.4	67.1	6804	3900 (p2)	43
EI 35B	35.0±0.6	24.25±0.25	12.0±0.3	12±0.3	24.5	18.15±0.25	4.6±0.3	0.552	121.6	67.1	8159	4200 (p2)	52
EI 40	40.0±0.6	27.25±0.25	11.65±0.35	11.65±0.35	27.2	20.25±0.25	7.5±0.3	0.517	148	77.0	11300	5100 (p2)	59
EI 50	50.0±0.7	33.35±0.35	14.6±0.4	14.6±0.4	34.0	24.75±0.25	9.0±0.3	0.411	230	94.0	21600	6450 (p2)	112
EI 60	60.0±0.8	35.85±0.35	15.6±0.4	15.6±0.4	44.5	27.85±0.35	8.5±0.3	0.443	247	109.0	27100	6250 (p2)	138
EI 70	70.0±1.2	54.0±0.25	31.6±0.5	22.2±0.5	46.3	42.8±0.25	10.4±0.5	0.209	695	146.0	101180	9100min (p2)	519